

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-301953

(43)Date of publication of application : 15.10.2002

(51)Int.Cl.

B60K 35/00

G09G 5/00

G09G 5/14

(21)Application number : 2002-007578

(71)Applicant : KOMATSU LTD

(22)Date of filing : 16.01.2002

(72)Inventor : UEDA TAKAHIRO

(30)Priority

Priority number : 2001019050

Priority date : 26.01.2001


Priority country : JP

(54) DISPLAY DEVICE FOR VEHICLE

(57)Abstract:

PROBLEM TO BE SOLVED: To display many items of information on the screen of a monitor panel with respect to the conditions of a construction machine and anomalies thereof without miniaturizing individual display components.

SOLUTION: When a displayed picture changes to an anomaly displaying picture 21, if a switch means 21f on the picture 21 is operated, the picture 21 is kept fixed for a prescribed period of time (two minutes, for example). Further, an anomaly displaying picture 21' may be kept fixed until a switch means 21h for release on the picture 21' is operated. Furthermore, when a monitoring displaying picture 11 and anomaly displaying pictures 21, 22, and 23 are cyclically displayed, if a switch means 21g on the picture 21 is operated, the displayed picture on this display device is returned from the picture 21 to the picture 11, and the picture 11 is displayed for a prescribed period of time (five minutes, for example). Further, it is also possible to hold the state of the displayed picture returned to the picture 11.

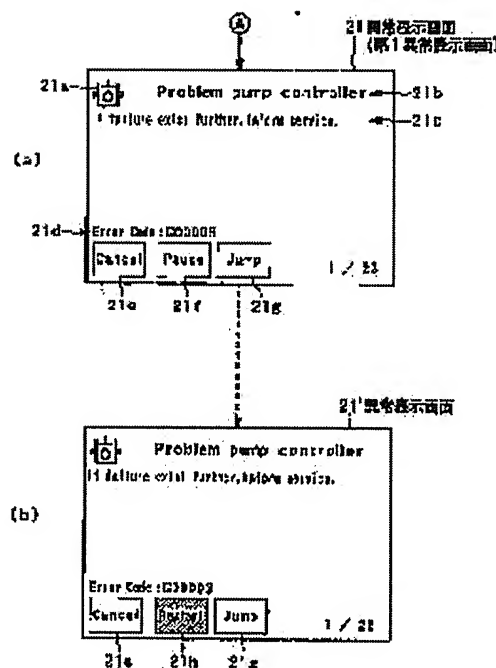

LEGAL STATUS

[Date of request for examination]

07.12.2004

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998;2003 Japan Patent Office

*** NOTICES ***

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.*** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] The display of the car characterized by indicating by sequential two or more display screens which prepare in a car the display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car, and include both two or more monitor display screens, two or more abnormality display screens or the monitor display screen, and the abnormality display screen in it on the same screen of said display.

[Claim 2] The display of the car characterized by indicating automatically by sequential two or more display screens which prepare in a car the display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car, and include both two or more monitor display screens, two or more abnormality display screens or the monitor display screen, and the abnormality display screen in it on the same screen of said display.

[Claim 3] The display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car on a car is prepared. While indicating by sequential on the same screen of said display automatically, two or more display screens including both two or more monitor display screens, two or more abnormality display screens or the monitor display screen, and the abnormality display screen The display of the car characterized by for a switching means responding for operating it and fixing the display screen of said display to the specific display screen.

[Claim 4] The display of the car characterized by displaying the monitor display screen on the same screen of said display in the middle of the display interval of the abnormality display screen while preparing the display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car on a car and indicating two or more abnormality display screens by sequential on the same screen of said display.

[Claim 5] The display of the car characterized by displaying the abnormality display screen on the same screen of said display in the middle of the display interval of the monitor display screen while preparing the display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car on a car and indicating two or more monitor display screens by sequential on the same screen of said display.

[Claim 6] The display which displays the abnormality display screen which displays the abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car on a car is prepared. While indicating by sequential on the same screen of said display, two or more display screens including both two or more monitor display screens, two or more abnormality display screens or the monitor display screen, and the abnormality display screen The display of the car with which a switching means is characterized by responding for operating it and returning the display screen of said display to the specific display screen.

[Claim 7] The display which displays the abnormality display screen which displays the

abnormalities caused by the monitor display screen or the car which displays the condition of each part of a car on a car is prepared. While indicating by sequential on the same screen of said display, two or more display screens including both the monitor display screen and the abnormality display screen When one display screen is displayed among current, the monitor display screen, and the abnormality display screen with said display The display of the car with which a switching means is characterized by responding for operating it, giving a current indication of while and returning the display screen of said display to the display screen of another side relevant to the display screen.

[Translation done.]